

Title: High Throughput Single Photon Detection for effective SII

Speakers: Verena Leopold

Collection/Series: Future Prospects of Intensity Interferometry


Subject: Cosmology

Date: October 31, 2024 - 10:45 AM

URL: <https://pirsa.org/24100101>

Abstract:

In this talk we want to promote a new kind of single photon detector able to record high count rates with the prospect of making stellar intensity interferometry (SII) measurements more effective. This micro-channel plate based photomultiplier tube from Photonscore (LINPix) is nearly dead time free and offers an active area of 8mm diameter. By choosing a matching photocathode, the quantum efficiency (QE) can take values greater than 30% at the desired wavelength. Using a Hi-QE Blue photocathode in a testbench featuring a fs-pulsed laser we were able to measure the timing resolution of the LINPix at different count rates from 190kHz up to 95 MHz. We find that the timing resolution of the detector only increases marginally when increasing the laser power and stays well below 100ps. Hence, we conclude that together with the LINTag, a suitable time to digital converter from Photonscore able to process the high throughput, this system can contribute significantly to the further development of SII.

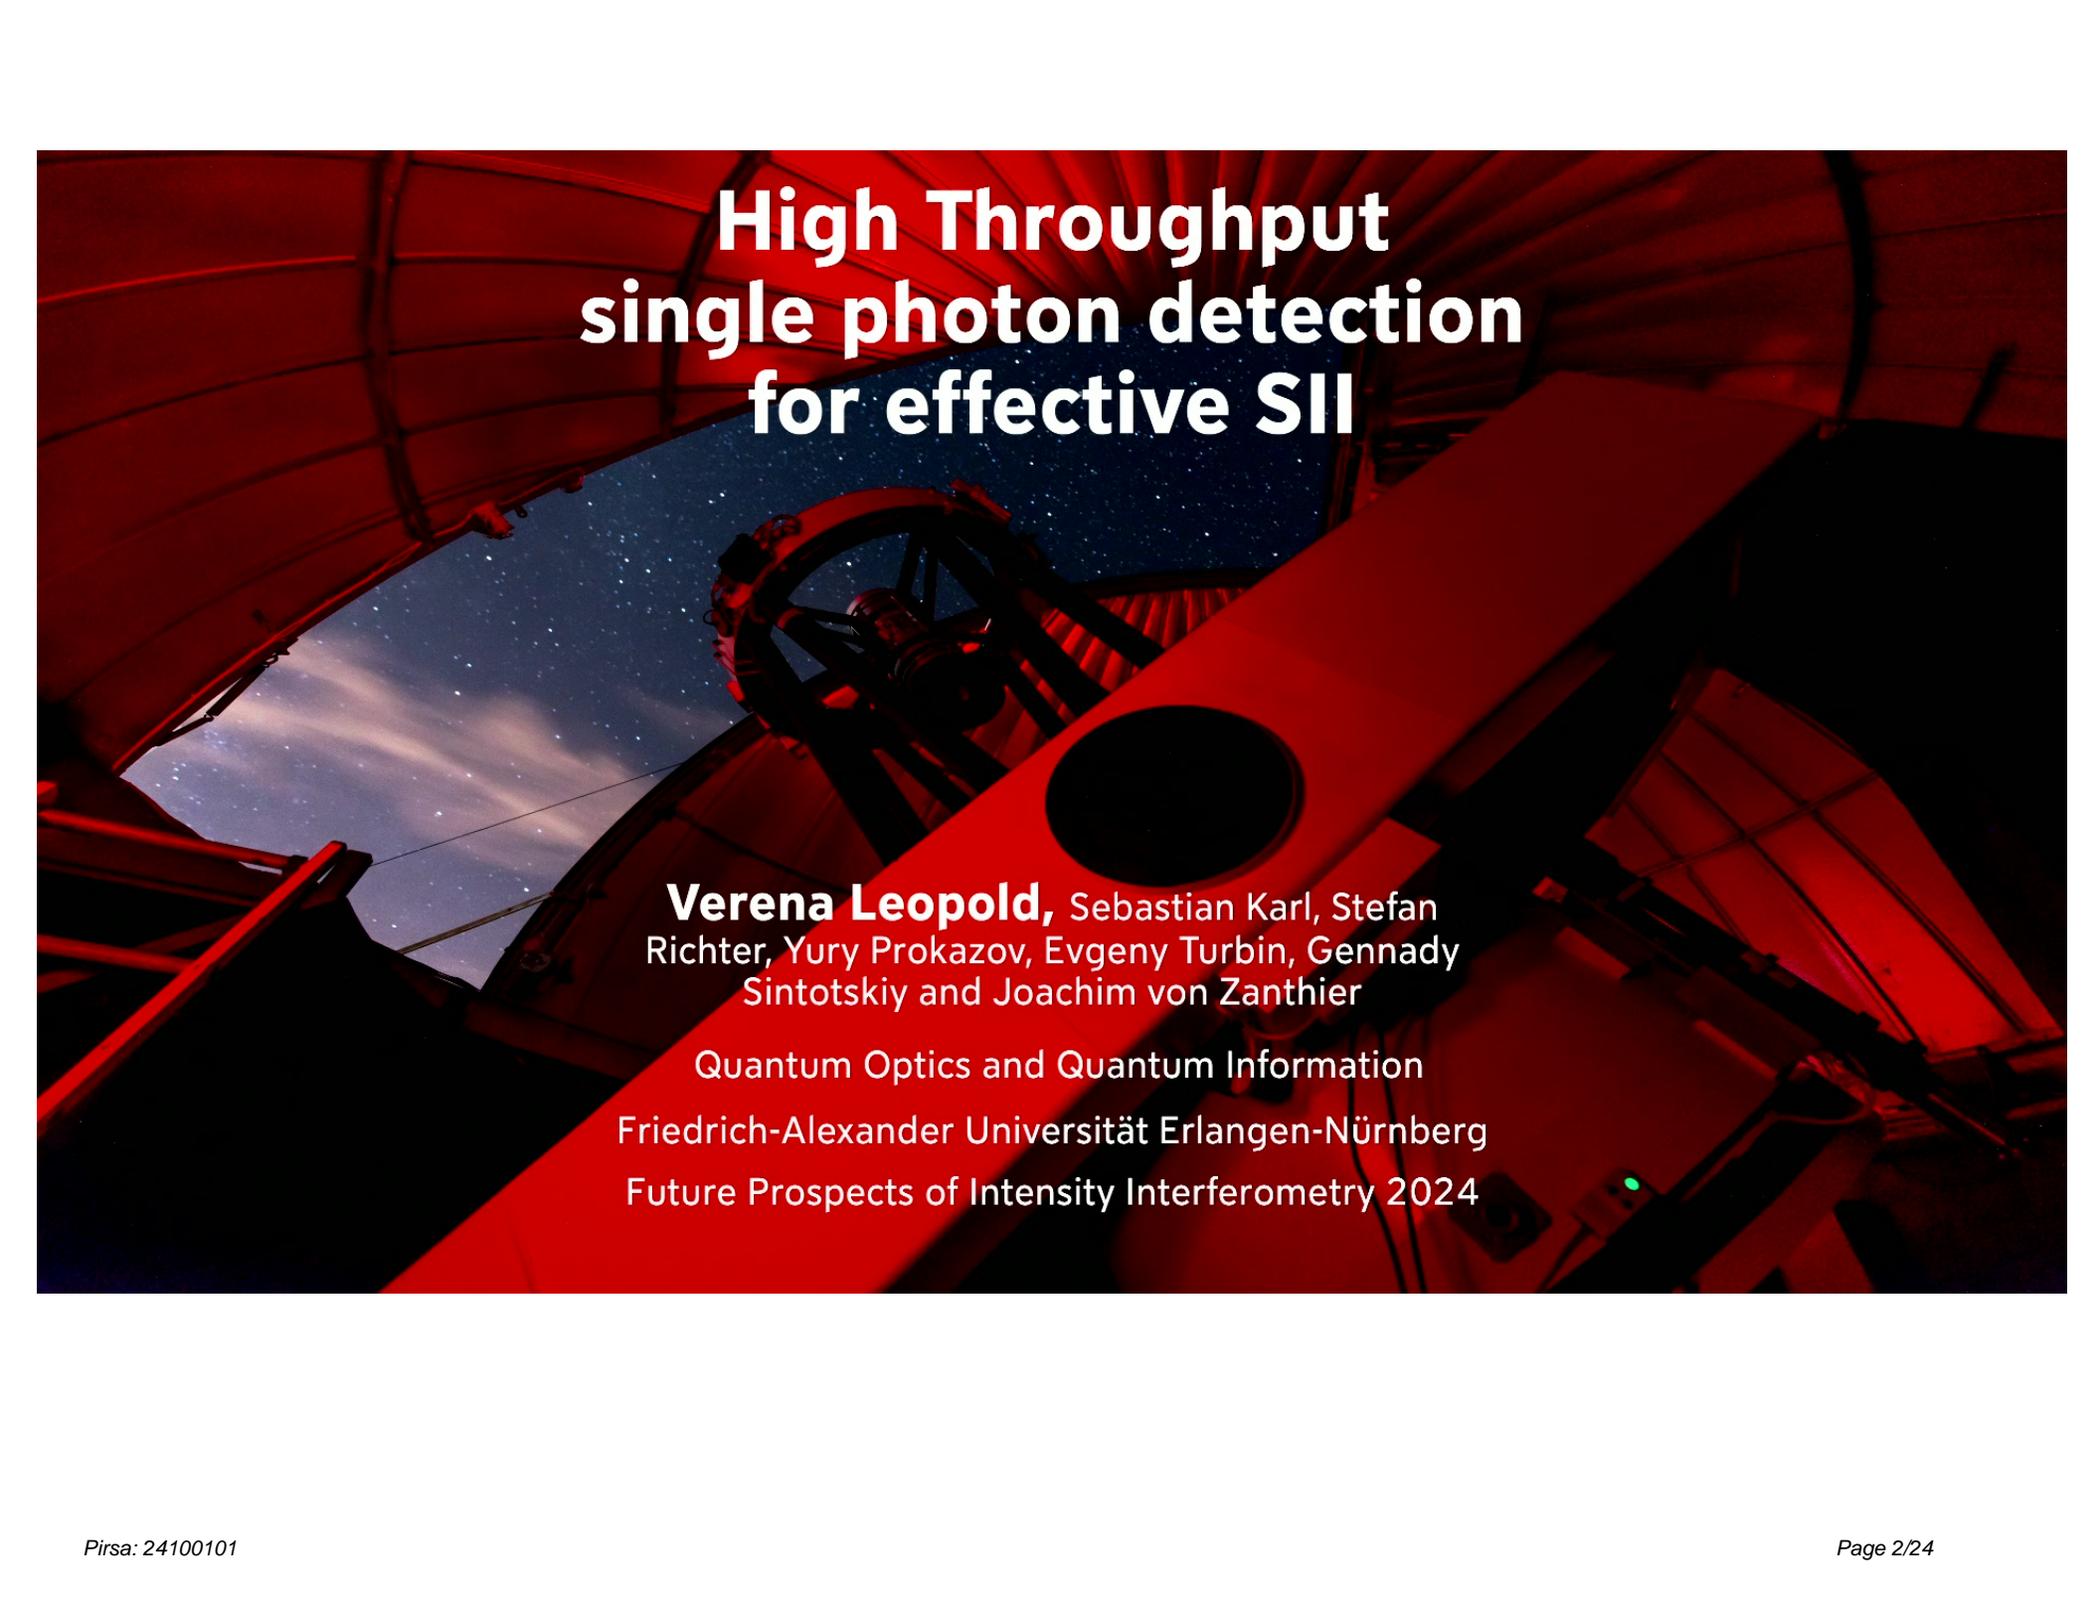


High Throughput single photon detection for effective SII

Verena Leopold, Sebastian Karl, Stefan
Richter, Yury Prokazov, Evgeny Turbin, Gennady
Sintotskiy and Joachim von Zanthier

Quantum Optics and Quantum Information
Friedrich-Alexander Universität Erlangen-Nürnberg
Future Prospects of Intensity Interferometry 2024

Agenda

1. Motivation
2. New kind of single photon detector: LINPix
3. Timing Resolution measurements
4. Synchronizing TDCs
5. Outlook

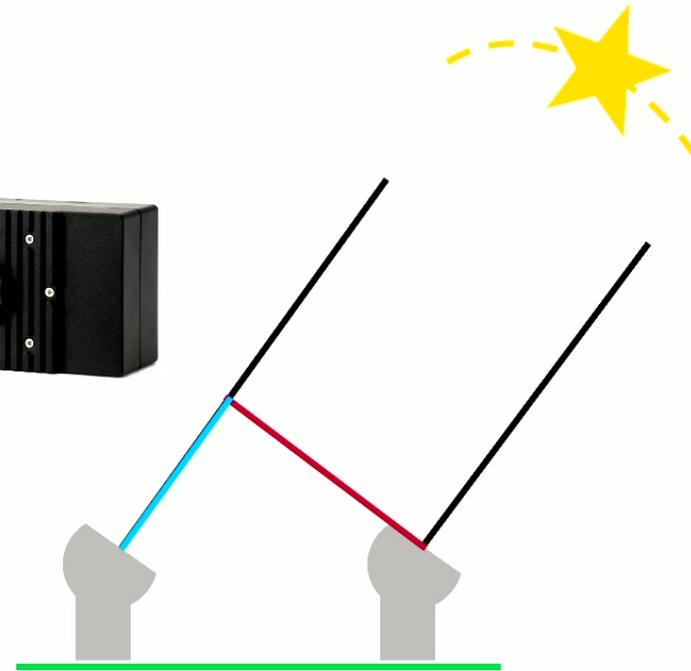

Motivation

Motivation

- Larger telescopes increase SNR in HBT measurements
- For bright stars: hybrid single photon detectors saturate for telescopes $> 1\text{m}$
- For spatial correlations ordered timestream is necessary
- Manageable data rate

Motivation



- Larger telescopes increase SNR in HBT measurements
- For bright stars: hybrid single photon detectors saturate for telescopes $> 1\text{m}$
- For spatial correlations ordered timestream is necessary
- Manageable data rate

Solutions:

- 1) Use new kind of detector
- 2) Use White Rabbit
- 3) Use high throughput TDC


New kind of single photon detector: LINPix

31.10.24

Future Prospects of Intensity Interferometry 2024 | V.Leopold | Quantum Optics and Quantum Information

5

LINPix from Photonscore

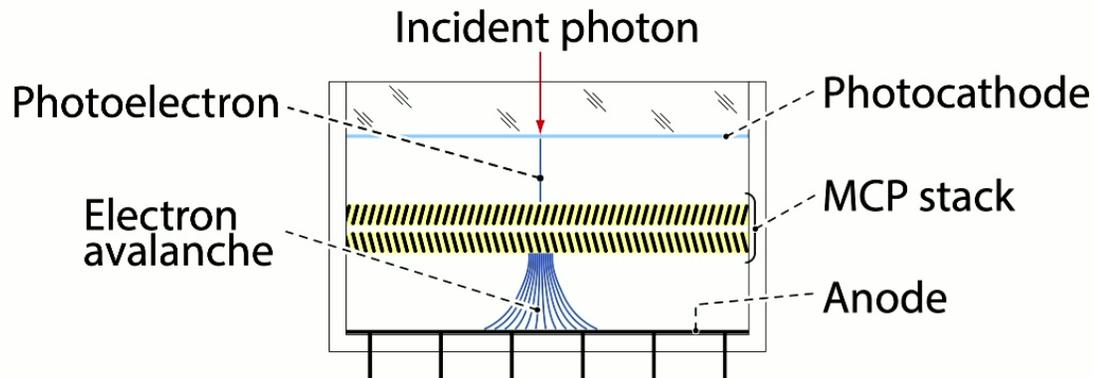


Multi channel plate:

- Amplify signal
- Chevron stack → Gain > 10^6
- Channel tilt = $5^\circ - 10^\circ$

Constant fraction discriminator (CFD):

- Reduce timing walk for varying pulse amplitude
- NIM out via SMA

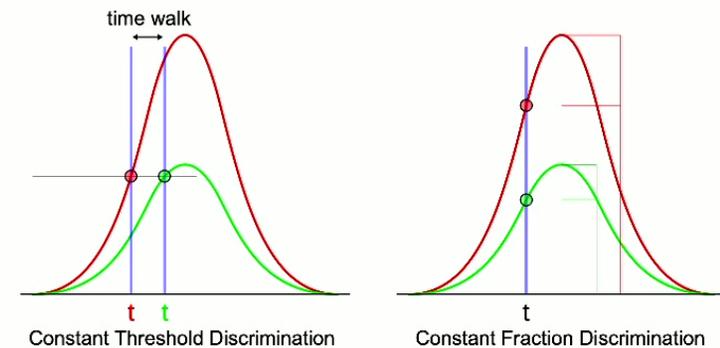


Possible Photocathodes for LINPix



Quantum efficiency

PHOTONIS
Reveal the invisible

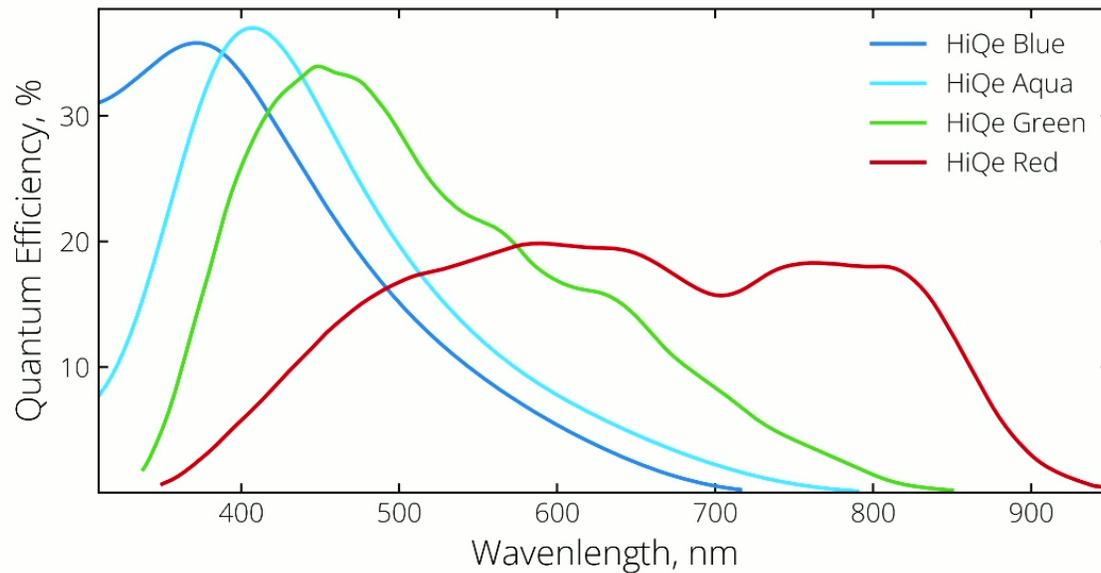


Photonscore.
PHOTON COUNTING MADE EASY

LINTag from PhotonScore



- time-tagger system developed for ultra-fast data acquisition
- Temporal accuracy of 8.5ps (FWHM) / 3.6ps (RMS)
- 8 high resolution channels
- 10G Ethernet SFB+ connection
- full-stack TCP/IP interface
- Transfer up to 400 MEvents/s in compressed hierarchical dataformat

Timing jitter

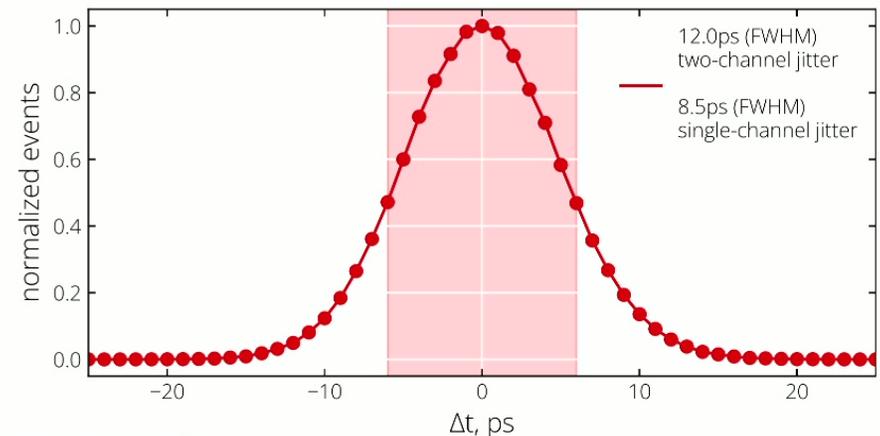

Photonscore.
PHOTON COUNTING MADE EASY


Timing resolution measurements

31.10.24

Future Prospects of Intensity Interferometry 2024 | V.Leopold | Quantum Optics and Quantum Information

9

Detector Testbench

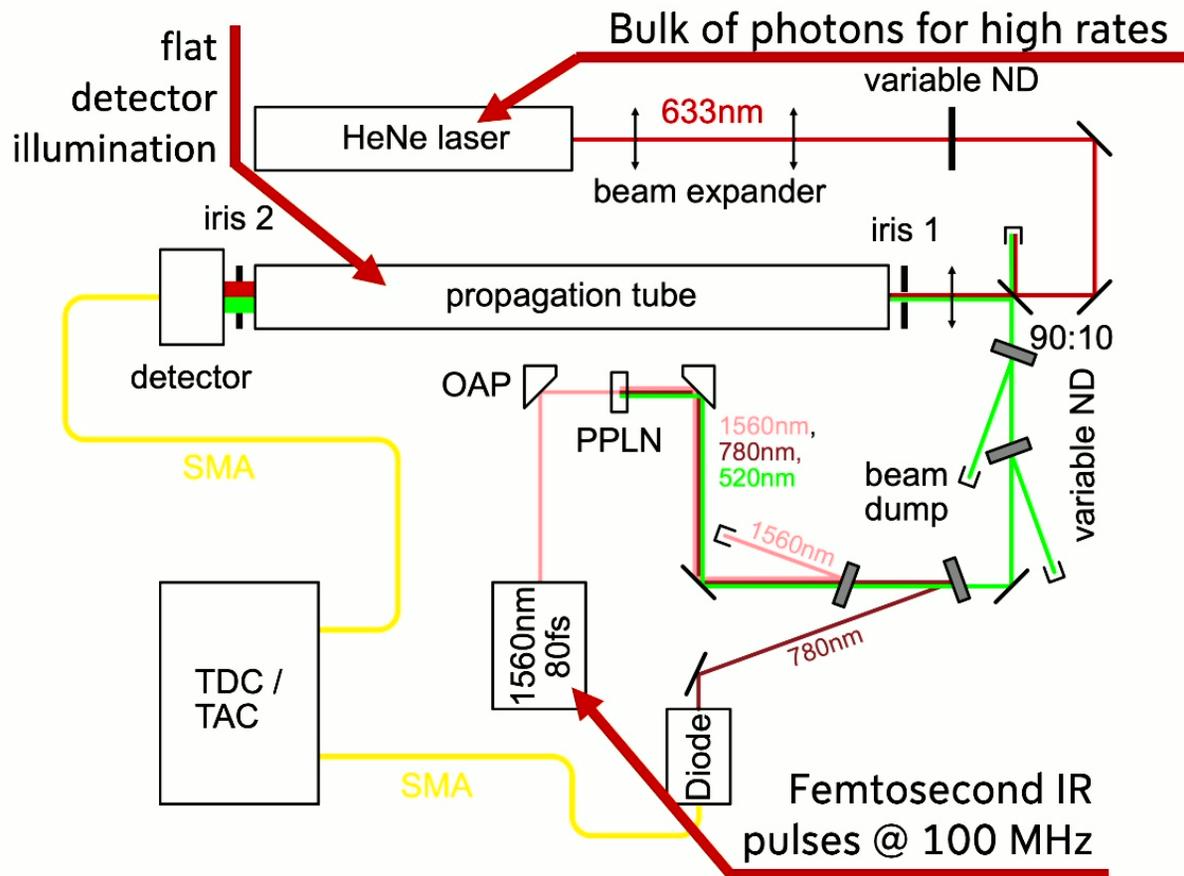


- Obtain timing resolution by correlating detector and diode signal
- Used Hi-QE Blue photocathode
- Tune count rate from 180kHz to 95MHz
- Vary opening diameter of iris 2

Timing resolution of the setup


Varying the illuminated area:

- Tune iris to 2mm opening diameter
- Smaller active area → similar timing resolution
- Full area increases jitter by < 5 ps



Iris closed and open

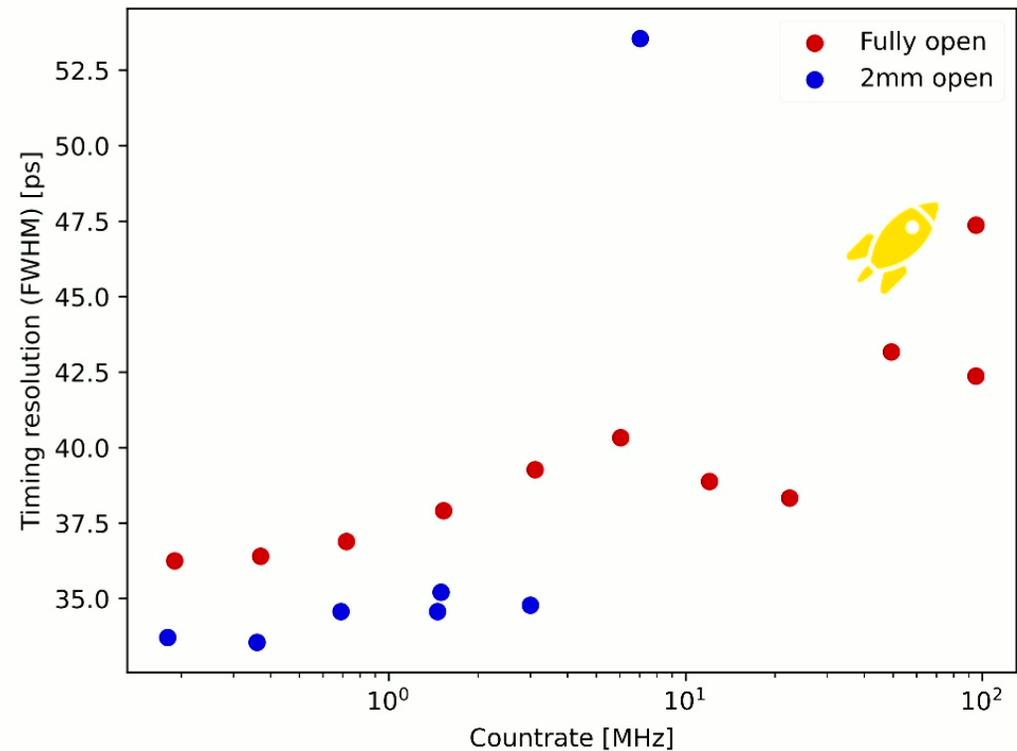

Timing resolution

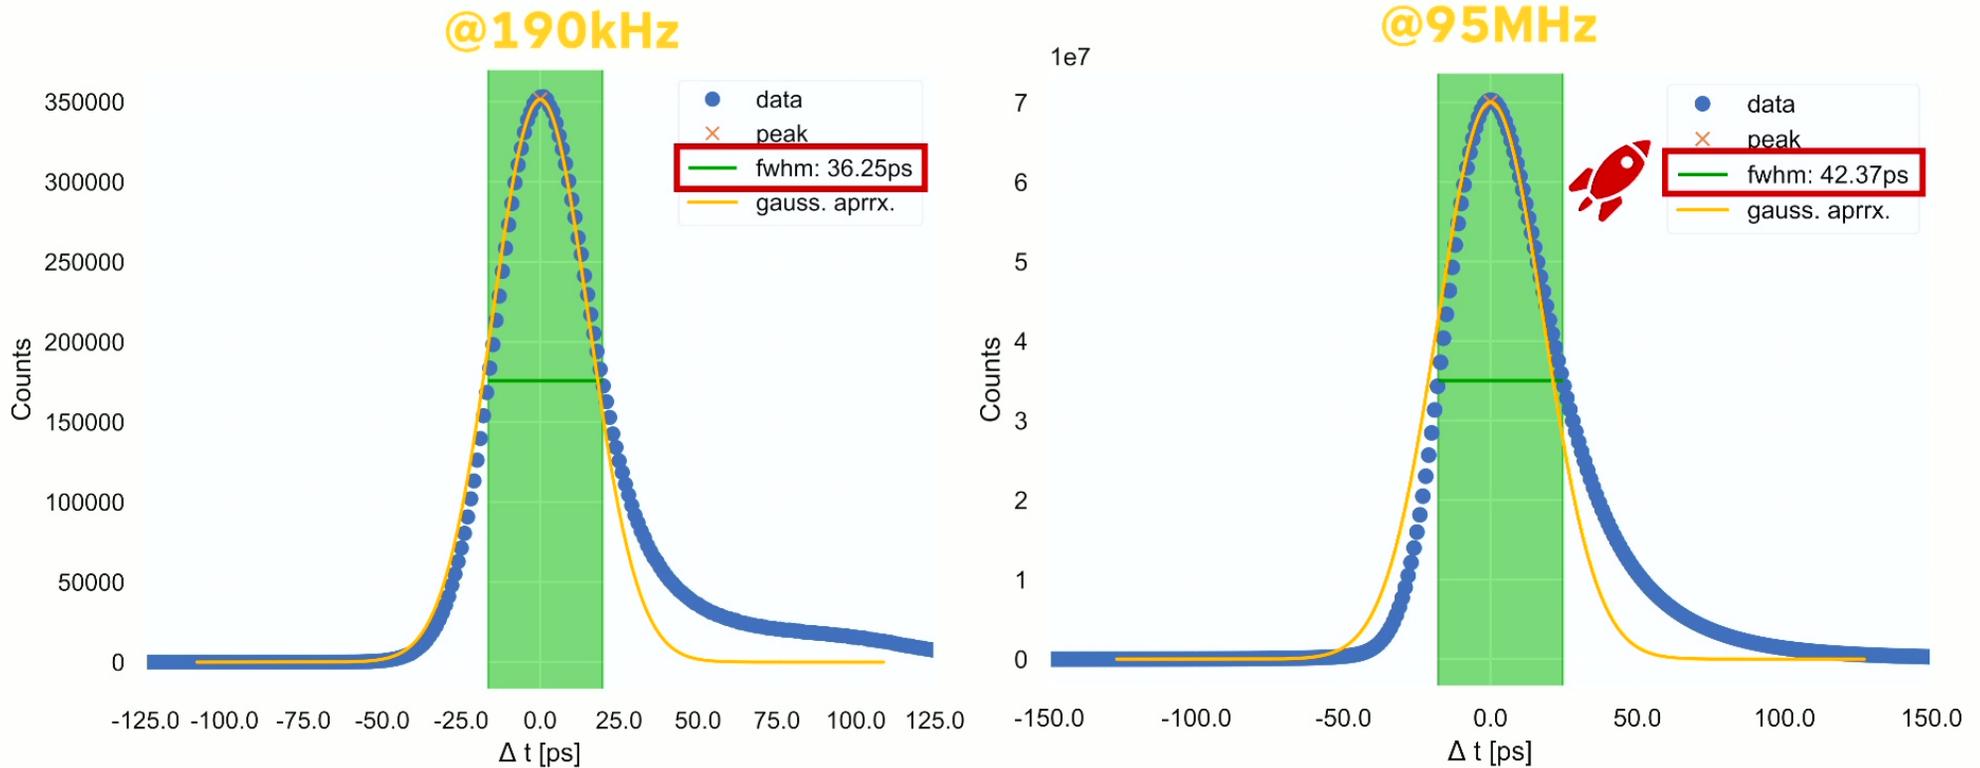

Timing resolution of the setup

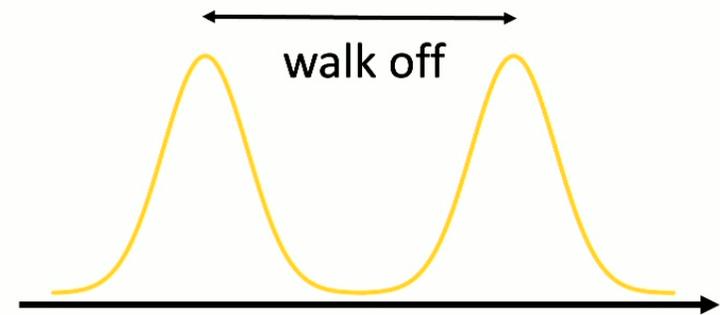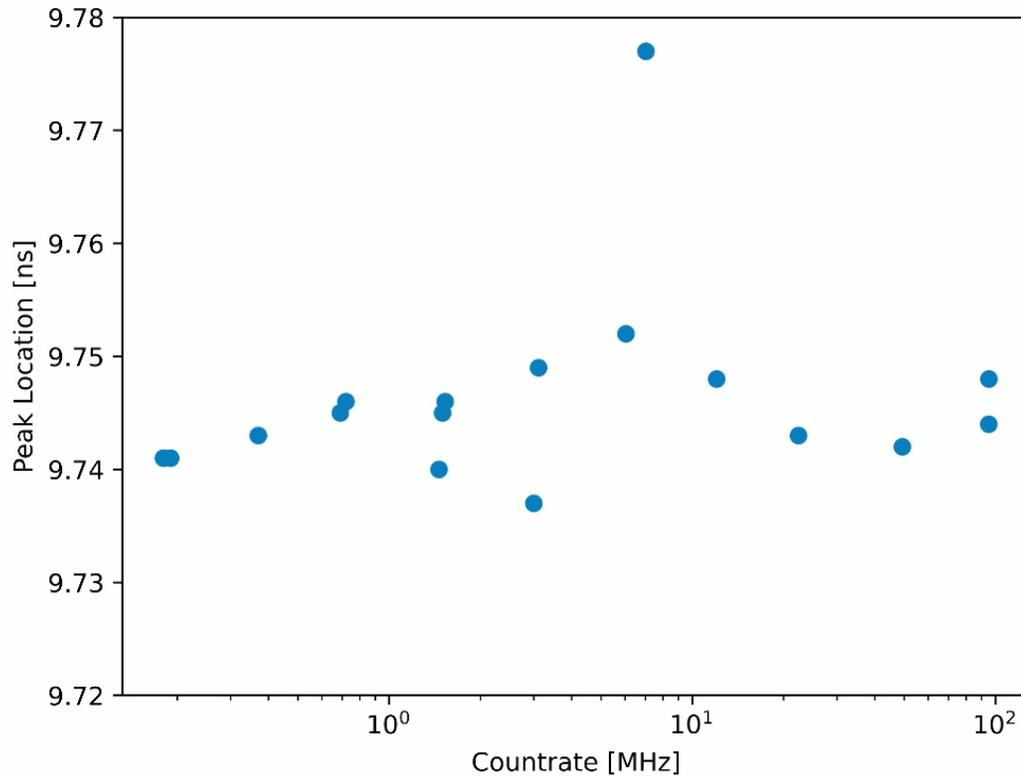

Peak position walk off:

- Higher rates shifts peak to higher delay times
- Walk off < 20 ps


Synchronizing TDCs

31.10.24


Future Prospects of Intensity Interferometry 2024 | V.Leopold | Quantum Optics and Quantum Information

14

Synchronizing TDCs Setup

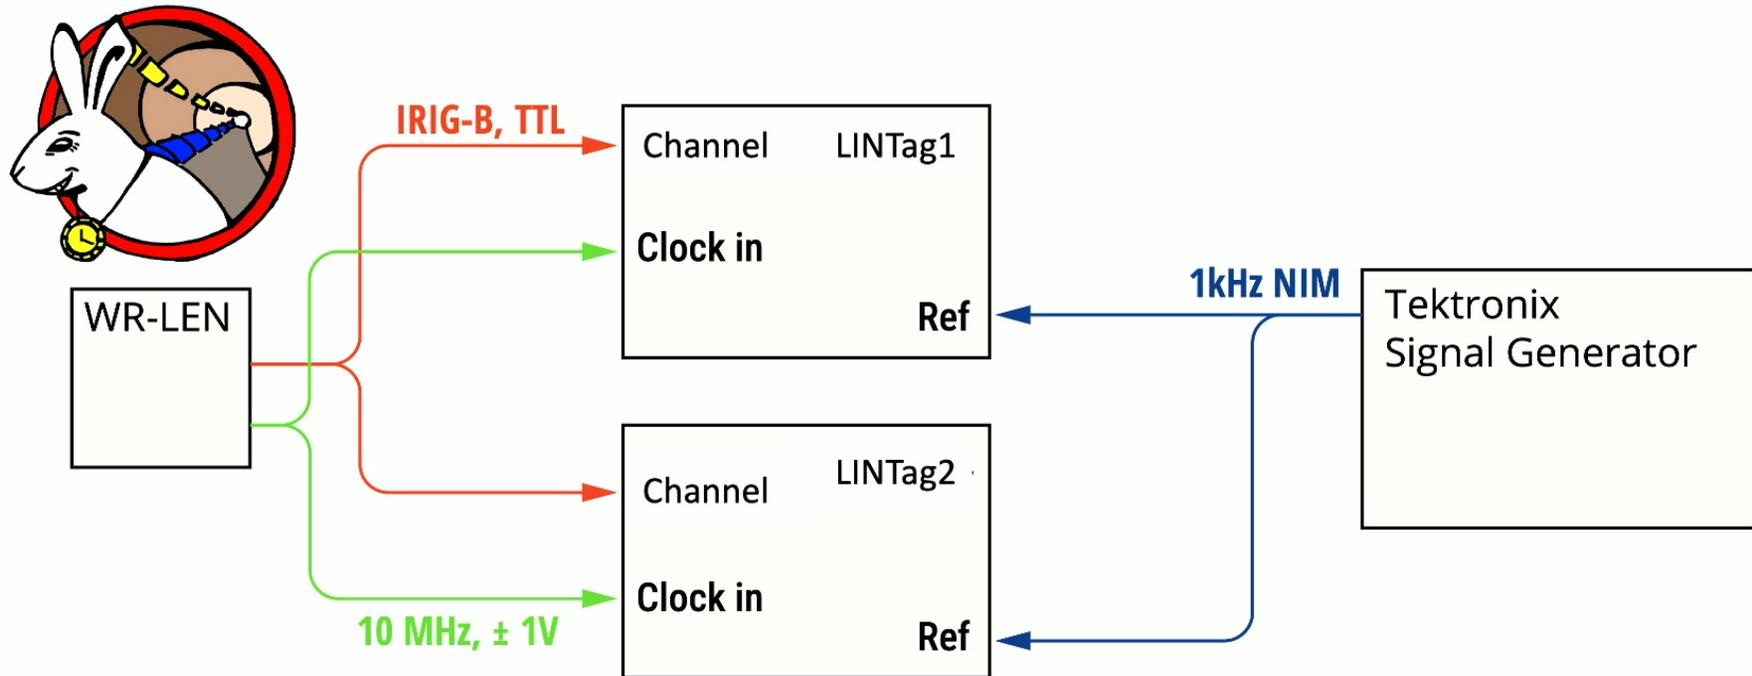

Synchronizing TDCs

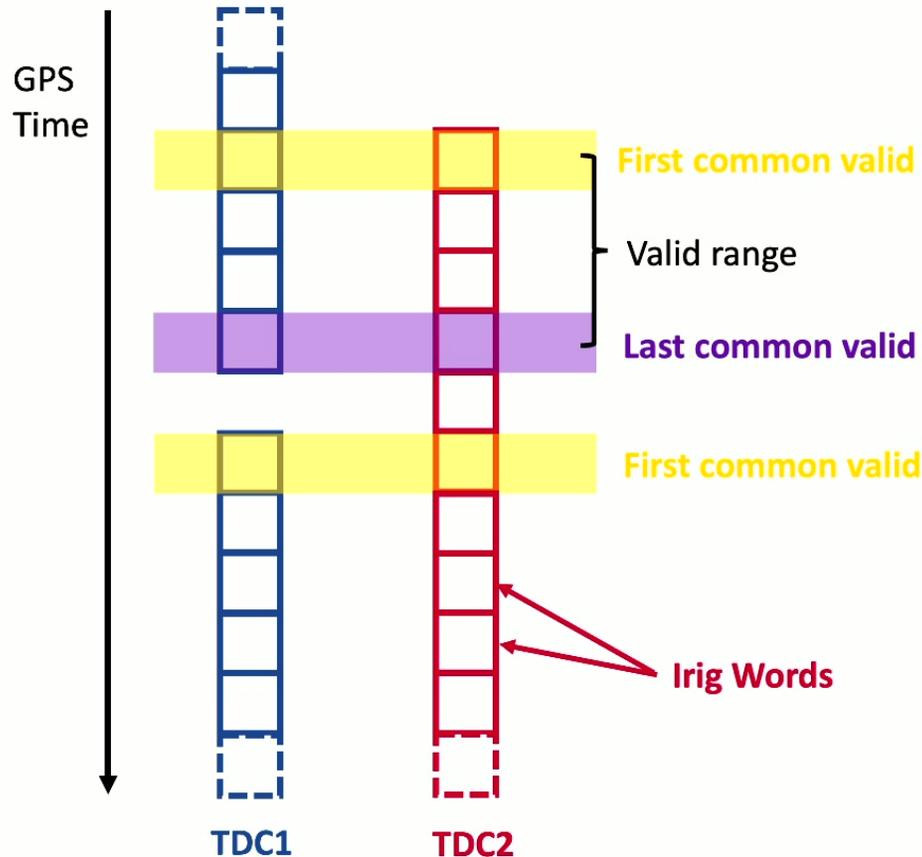


Procedure:

- Build an IRIG-Word Stack to each provided file
- Finding the range when all overlap. If outliers exist they won't be processed
- Search for file with smallest TDC-Counter and use it as a time reference for all other files
- Check each second the offset between matching IRIGs and compensate using a smooth-function

Synchronizing TDCs



Sync jitter over 20min

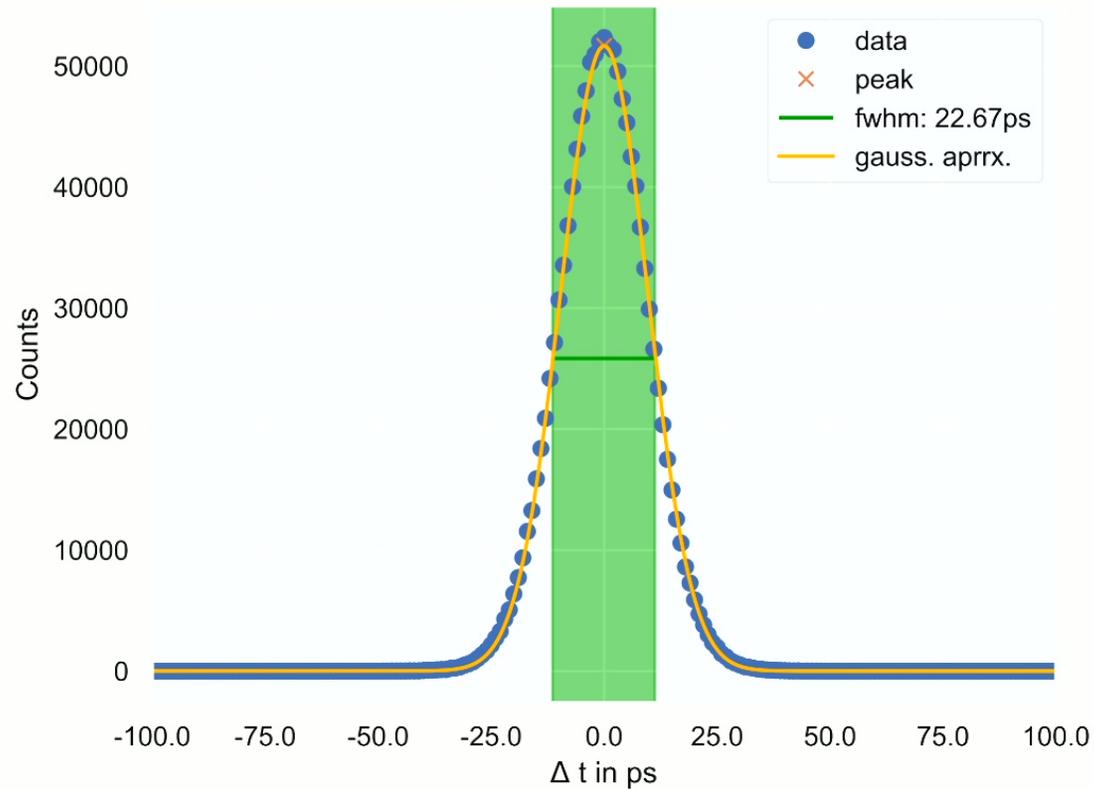

Outlook

31.10.24

Future Prospects of Intensity Interferometry 2024 | V.Leopold | Quantum Optics and Quantum Information

18

Outlook



To Do:

- 1) Higher count rates?
- 2) Bursts?
- 3) Km baselines?

Outlook



To Do:

- 1) Higher count rates?
- 2) Bursts?
- 3) Km baselines?

- 1) Try 100MHz bunching
- 2) Check burst capability of LINPix


Outlook



To Do:

- 1) Higher count rates?
- 2) Bursts?
- 3) Km baselines?

- 1) Try 100MHz bunching
- 2) Check burst capability of LINPix
- 3) Try WR with long fibers and test synchronizability of multiple TDCs in the field

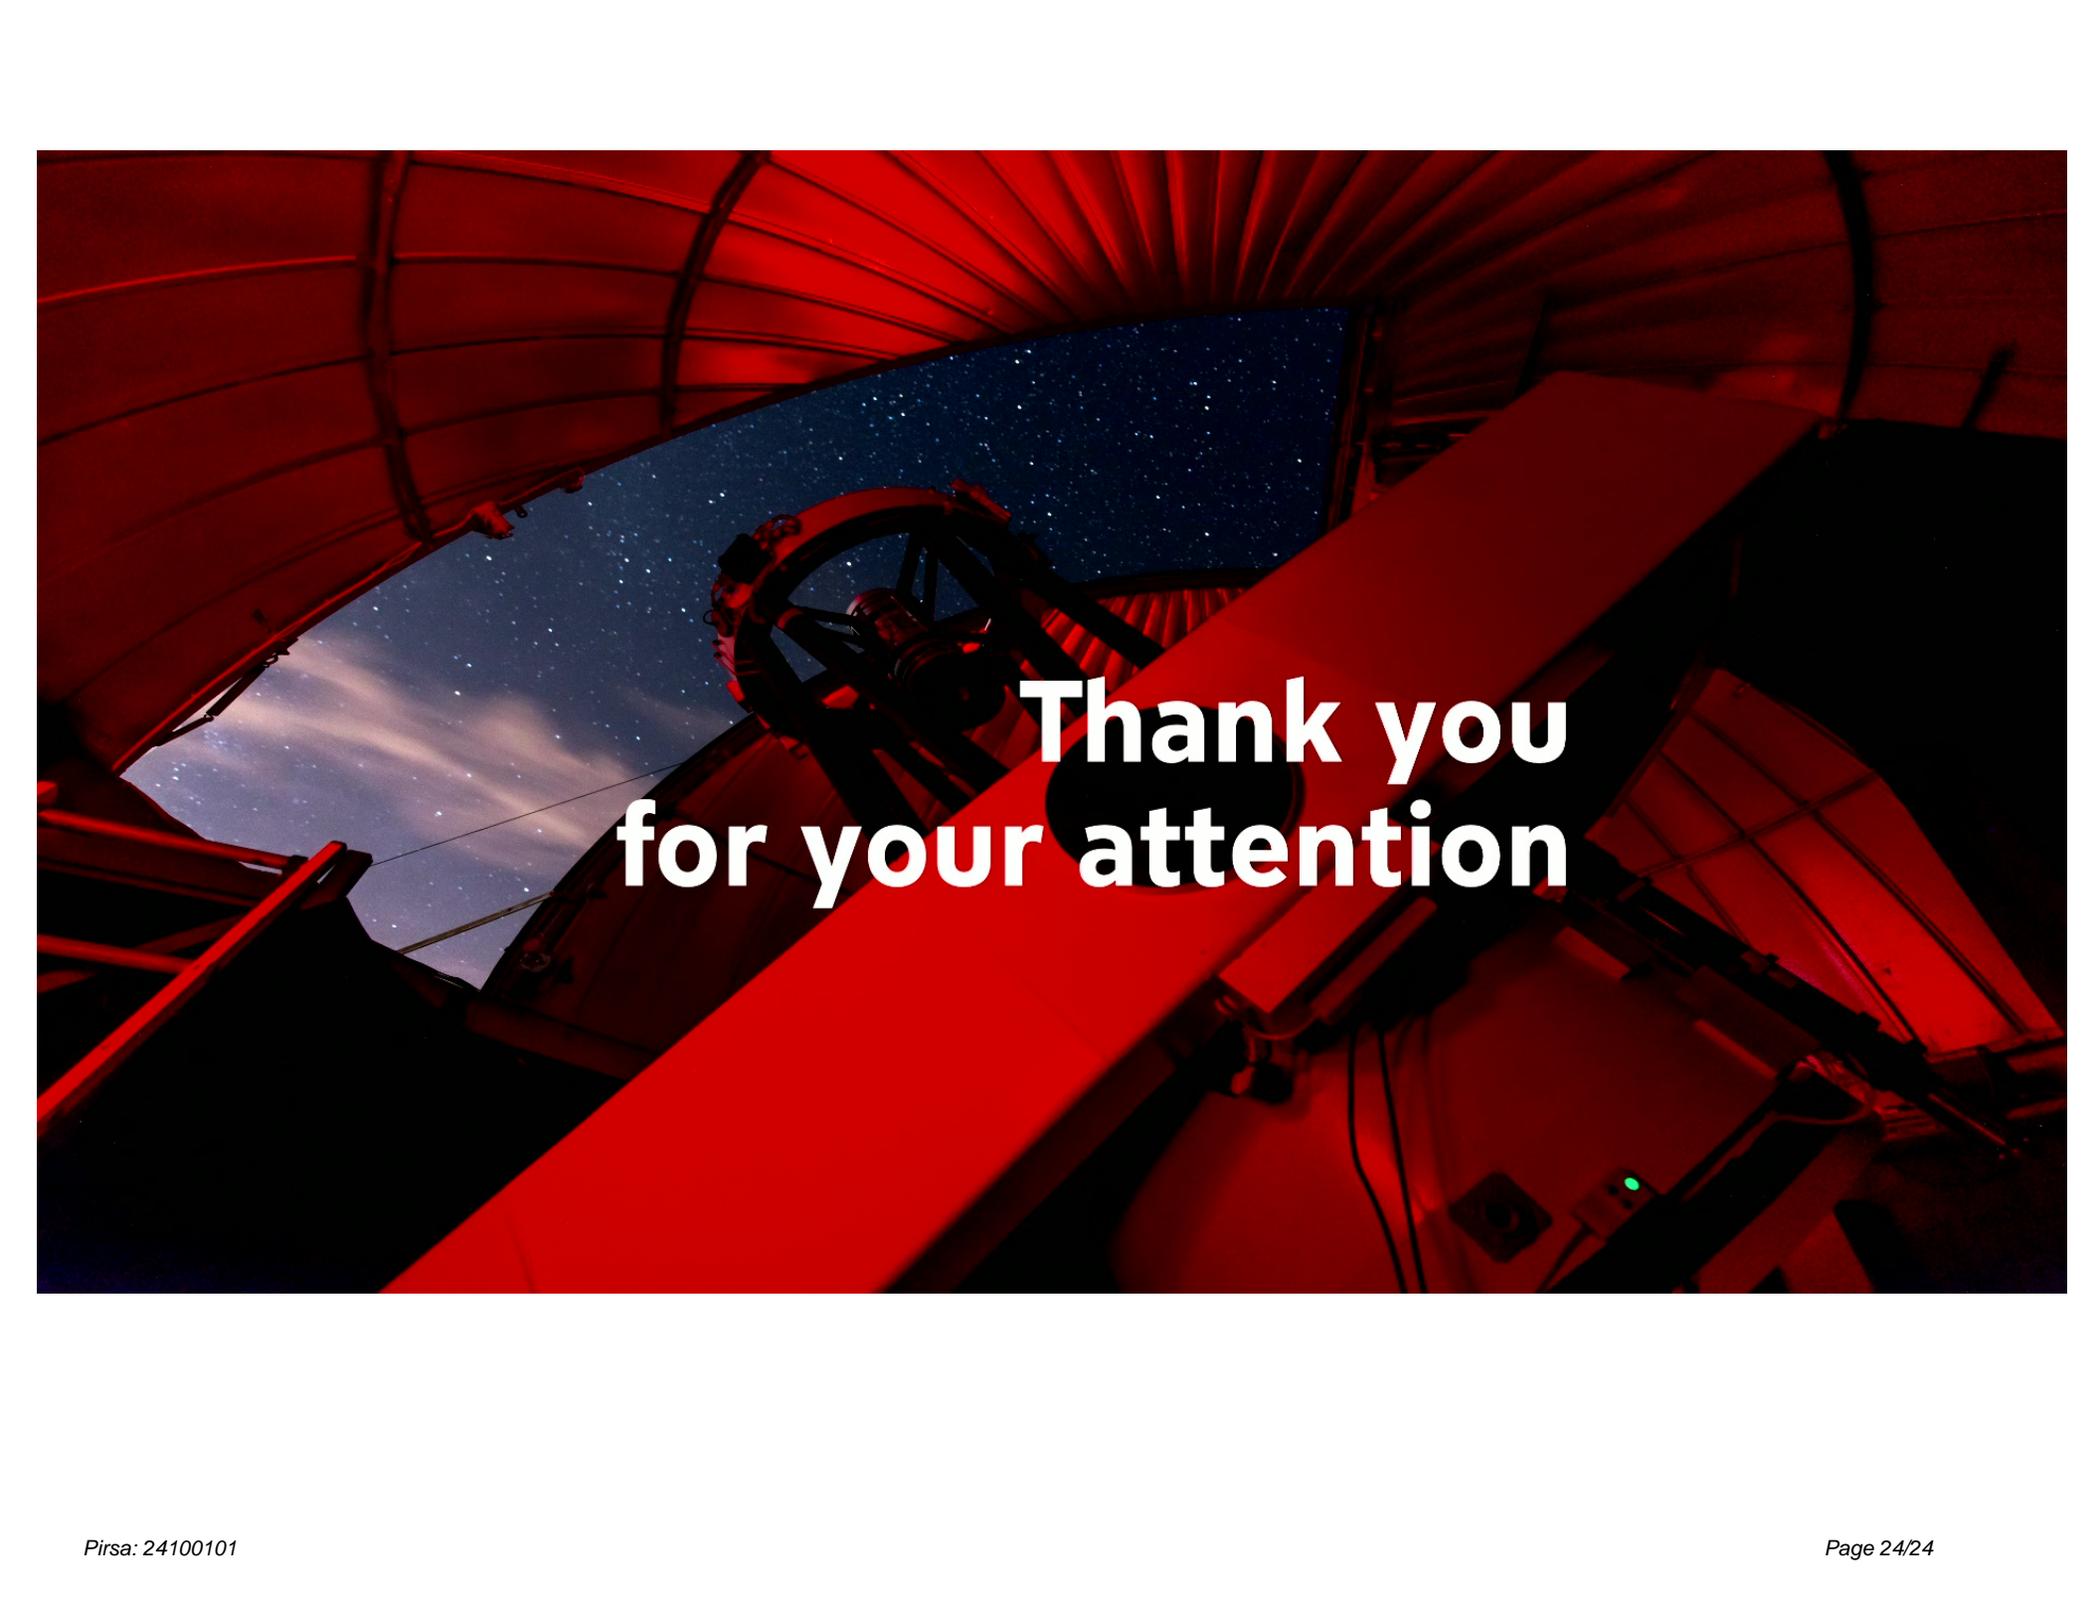

**Thank you
for your attention**